


# DU-19/U DISPLAY UNIT



FRONT VIEW

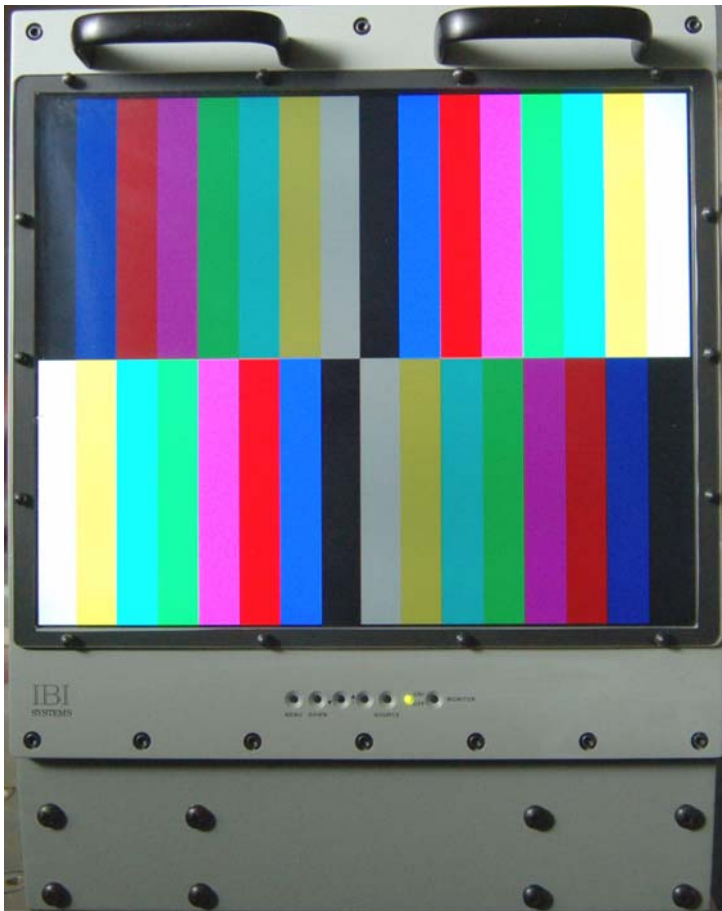

REAR VIEW

## CHARACTERISTICS AND PERFORMANCE

Display: 17.0 inch diagonal TFT-LCD  
Display Colors: 16.7M  
Number of Pixels: 1280X1024  
Pixel Pitch: 0.264(H) X 0.264(W) mm  
Brightness: 150fL typical  
Video In: RGB Sync on Green  
EIA Standard, NTSC Composite  
Video Out: RGB Sync on Green  
Input Power: 115 VAC, single-phase, 60 Hz  
Input Current: 0.55 Amp Typical  
Operating temperature: 0 to 50°C  
Non-operating temperature: -25 °C to 65 °C  
Humidity: 95% max non-condensing

**DU-19/U** Display Unit is a COTS, Form, Fit and Functional replacement of **IP-1533** CRT Indicator Unit.

Tested to meets following qualifications:

- Grade A, Type 1 shock per MIL-S-901D
- Vibration per MIL-STD-167-1
- Power per MIL-STD-1399 Section 300A, Paragraph 5.3.1 and 5.3.2
- EMI per MIL-STD-461E; RE 101, RE 102, RS 101, RS 103, CE 101, CE 102, CS 101, CS 114
- Thermal/Humidity per MIL-STD-810F, Thermal Method 501, 502; Humidity Method 507.3 Procedure II

**For further details contact:**



**SYSTEMS, INC.**

6842 NW 20<sup>TH</sup> AVE, FORT LAUDERDALE, FL 33309, TEL: 954-978-9225, FAX: 954-978-9226, E-MAIL: [ibisys@aol.com](mailto:ibisys@aol.com)